

ANKER

SERIES

7

For FAQs and more information, please visit:
anker.com/support




@anker_official
@anker_jp



@Anker Deutschland
@Anker Japan
@Anker



@AnkerOfficial
@Anker_JP

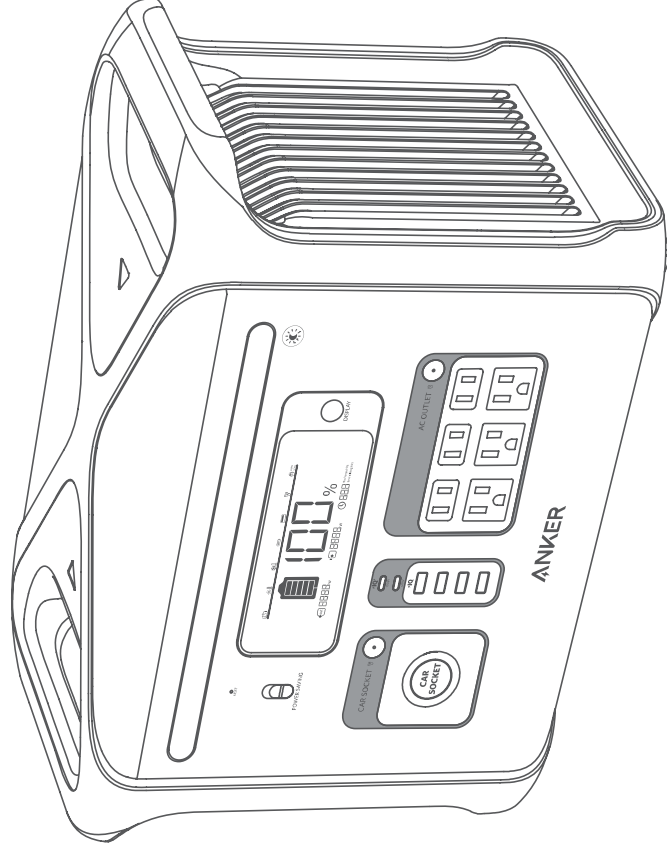


Anker 757 Portable Power Station (PowerHouse 1229Wh) **USER MANUAL**

English	01-10
What's in the Box	01
Overview	01
Recharging Your Power Station	02
Powering Your Devices	03
Uninterruptible Power Supply (UPS)	04
Power Saving Mode	04
Light	04
LCD Screen Guide	05
Trouble Shooting	06
FAQ	06
Specifications	07
Attention	07
Important Safety Instructions	07
Disclaimer	09
Customer Service	10

日本語	11-19
同梱物	11
外観	11
本製品の充電	12
機器の充電	13
UPS (無停電電源装置) 機能の利用	14
省電力モード	14
ライト	14
液晶画面ガイド	15
「故障かな？」と思ったら	16
よくある質問	16
製品の仕様	17
注意	18
安全にご使用いただくために	18
免責事項	18
カスタマーサービス	19


What's in the Box



Anker 757 Portable Power Station
(PowerHouse 1229Wh)



AC Charging Cable



Solar Charging Cable





User Manual



Car Charging Cable

Overview

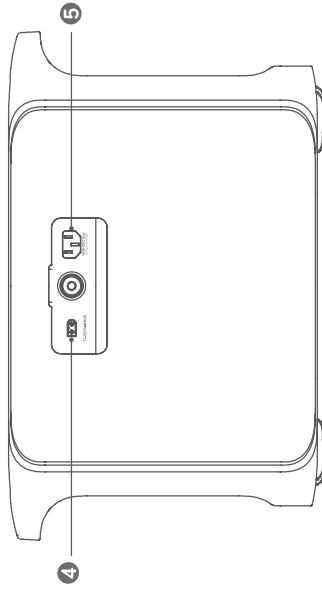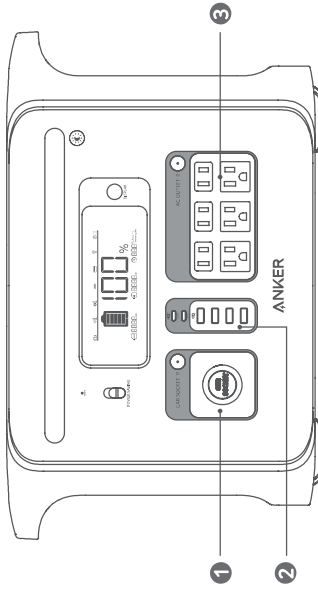


Output Ports:		Input Ports:	
1	Car Socket	4	XT-60 DC Input Port
2	USB Ports	5	AC Input Port
3	AC Output Ports		

Recharging Your Power Station


AC recharging (1000W Max)

Recharge your Power Station by connecting to a wall outlet with the AC charging cable.

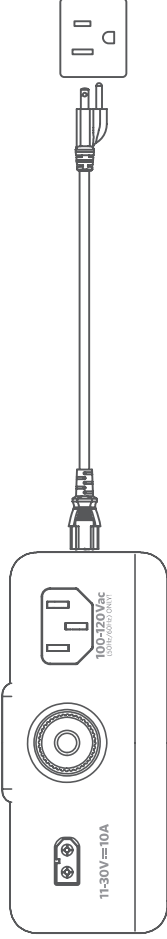


Solar panel recharging (300W Max)

Recharge your Power Station by connecting up to 3 100W solar panels in parallel with a solar charging cable (not included).

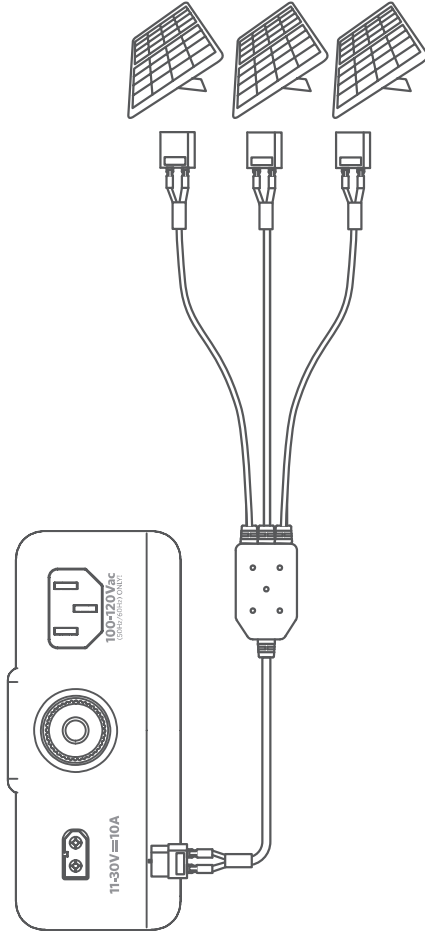

Car recharging (120W Max)

Recharge your Power Station by connecting to a car's output port with the car charging cable.

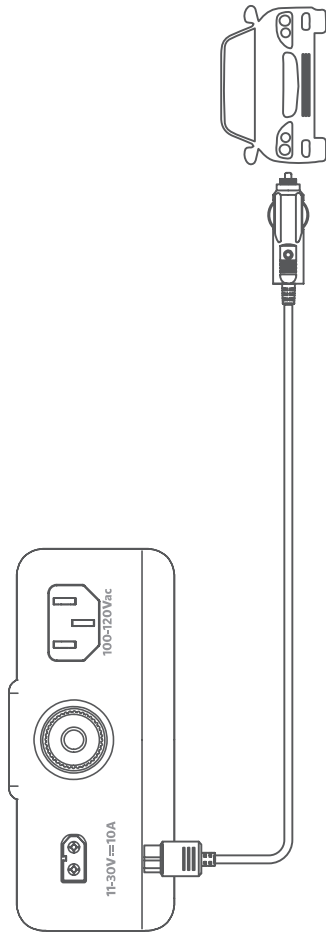


When your portable power station only has 1% battery remaining, the Remaining Battery indicators will flicker to remind you to recharge the product.

Powering Your Devices


AC charging

Press the AC button and connect your devices to the AC output ports.

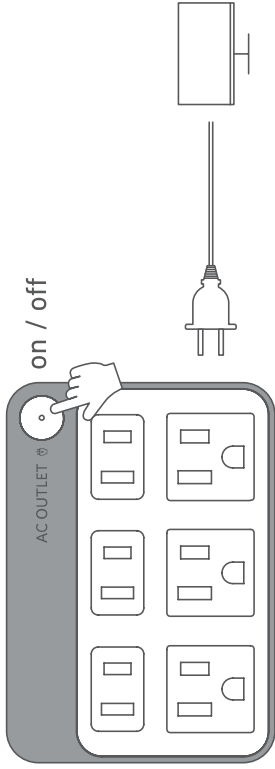


USB charging

Connect your devices to the USB ports.

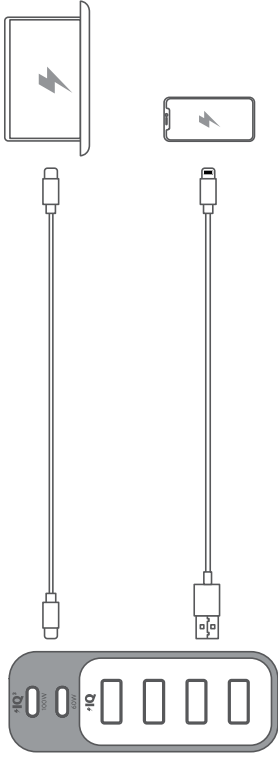


Car socket charging

Turn on the car socket and connect your devices to start charging.

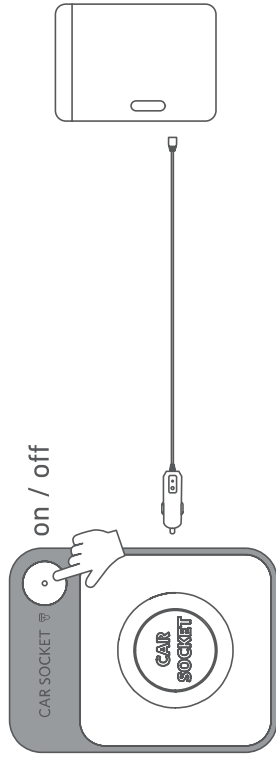

Uninterruptible Power Supply (UPS)


To use the UPS function, connect your Power Station to a wall outlet with the AC charging cable, then press the button and connect your devices via the AC output ports.

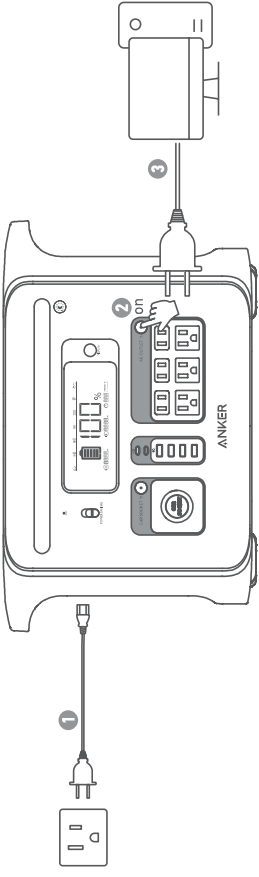

Power Saving Mode

Switching on the power saving mode prevents wasting power by automatically turning off the Power Station once all your devices are fully charged.


Switching off the power saving mode will enable stable charging over an extended period, such as for time-lapse photography or for sleeping with a CPAP machine.

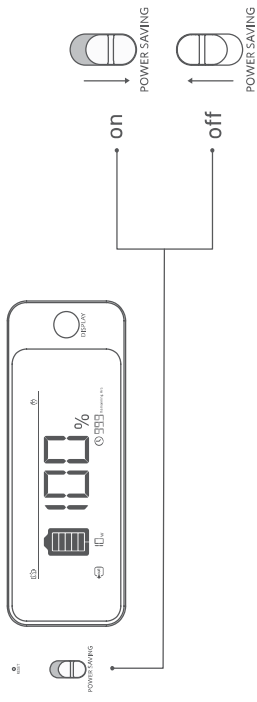

Light


Ambient light

Press the button once to turn on the ambient light, and press again up to 2 times to switch between brightness levels.

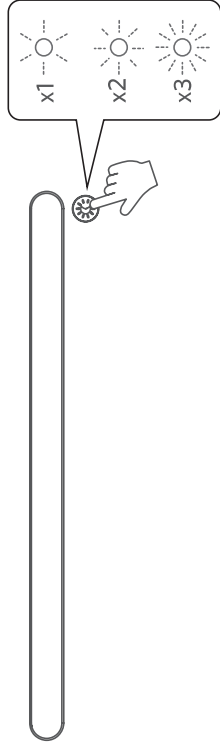


SOS mode

Press and hold the button for 2 seconds to turn on SOS mode.

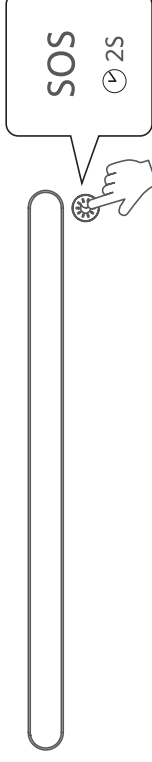

LCD Screen Guide

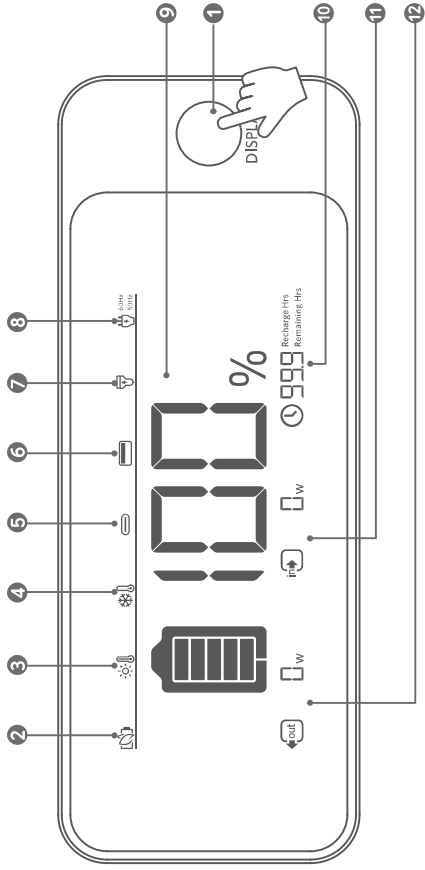

1 LCD Screen Button

Press the button to turn on the LCD screen.

2 Power Saving Mode

3 High-Temperature Alert

• When this icon shows, stop using the product and leave it to cool down until the icon disappears.

4 Low-Temperature Alert

• When this icon shows, stop using the product until the icon disappears.

5 USB-C Output Port

6 USB-A Output

7 Car Charging

8 AC Charging and Voltage Frequency

Press the AC output port on/off button for 2 seconds to switch the frequency.

9 Remaining Battery

10 Time to Recharge / Remaining Battery in Hours


11 Current Input Power

12 Current Output Power

Trouble Shooting

AC recharging failure

When AC recharging is unavailable, check to see if the overload protection switch is switched on. If so, press it down to reset, and then recharging can resume.

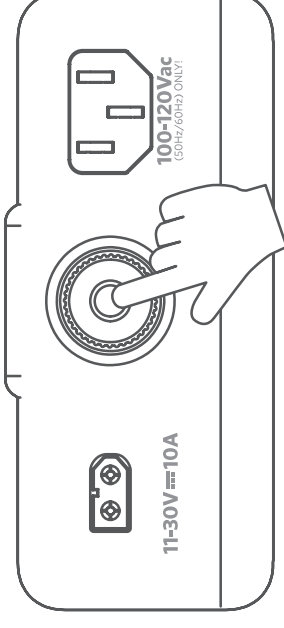


AC charging failure

If AC charging is unavailable, it's possible that the connected devices exceed 1500W. Try unplugging one or more of the connected devices to see if this resolves the issue.

Resetting your Power Station

If your Power Station isn't working correctly, press the reset button (located on the front of the product) for 1 second for a factory reset. If the Power Station still doesn't work, please visit support@anker.com

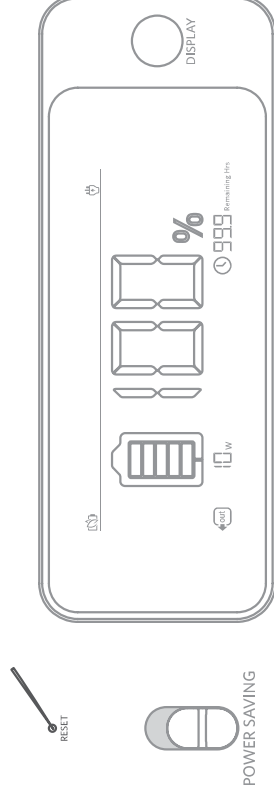

FAQ

Q1: Why does the Power Station's battery drain even when no devices are connected?

When the AC and Car Socket control button is turned on, even if no devices are being charged, there will still be a certain amount of no-load power consumption. To avoid this, make sure the AC and Car Socket charging button is off or turn on the power saving mode when you're not using the Power Station.

Q2: What's the max power output of the AC output ports?

The AC output ports can deliver a maximum of 1500W to connected devices.

Q3: Can I recharge the product while charging connected devices?

Yes.

Q4: Can this product power a CPAP machine?

Yes, but make sure to turn off the power saving mode first.

Q5: What kind of solar charger can charge this product?

Any 11-30V solar charger with an XT-60 female connector.

Specifications	
Cell Capacity	1229 Wh
AC Input Voltage	100-120V~ 12A Max, 50Hz/60Hz
AC Input Power (Charging)	1000W Max
AC Input Power (Bypass Mode)	1440W Max
Solar Panel Input	11-30V --- 10A(300W Max)
Car Charger Output	12V --- 10A Max
AC Output	110V~ 13.64A, 50Hz/60Hz, 1500W Max
USB-A Output	5V --- 2.4A (2.4A Max Per Port)
USB-C Output (100W)	5V --- 3A/9V --- 3A/15V --- 3A/20V --- 3A/20V --- 5A (100W Max)
USB-C Output (60W)	5V --- 3A/9V --- 3A/15V --- 3A/20V --- 3A (60W Max)
UPS	<20ms
Discharging Temperature	-4°F-104°F / -20°C-40°C
Charging Temperature	32°F-104°F / 0°C-40°C
Size	46.3*28.8*23.7 cm/ 18.2*11.3*9.3 inches
Net Weight	19.9 kg/ 43.9 lb
Gross Weight	22.1 kg / 48.7 lb

Attention



Not permitted on aircraft.

IMPORTANT SAFETY INSTRUCTIONS

WARNING - When using this product, basic precautions should always be followed, including the following:
Read all the instructions before using the product.

- To reduce the risk of injury, close supervision is necessary when the product is used near children.
- Do not put fingers or hands into the product.
- Do not expose the product to rain or snow.
- Use of a power supply or charger not recommended or sold by the product manufacturer may result in a risk of fire or injury to persons.
- To reduce risk of damage to the electric plug and cord, pull the plug rather than the cord when disconnecting the product.
- Do not use the product in excess of its output rating. Overload outputs above rating may result in a risk of fire or injury to persons.
- Do not use the product that is damaged or modified. Damaged or modified batteries may exhibit unpredictable behavior resulting in fire, explosion or risk of injury.
- Do not operate the product with a damaged cord or plug, or a damaged output cable.
- Do not disassemble the product. Take it to a qualified service person when service or repair is required.

- Incorrect reassembly may result in a risk of fire or electric shock.
- Do not expose to fire or high temperatures. Exposure to fire or temperatures above 130°C may cause explosion. To reduce the risk of electric shock, unplug the power pack form the outlet before attempting any instructed servicing.
 - Have servicing performed by a qualified repair person using only identical replacement parts. This will ensure that the safety of the product is maintained.
 - When charging a device, the product may feel warm, this is a normal operating condition and should not be cause for concern.
 - When charging the internal battery, work in a well ventilated area and do not restrict ventilation in any way.
 - Do not clean the product with harmful chemicals or detergents.
 - Misuse, dropping or excessive force may cause product damage.
 - When disposing of secondary cells or batteries, keep cells or batteries of different electrochemical systems separate from each other.
- CAUTION: Risk of explosion if the battery is replaced by an incorrect one.
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, can result in an explosion;
 - Leaving a battery in an extremely high temperature environment can result in an explosion or leakage of flammable liquid or gas;
 - A battery subjected to extremely low air pressure may cause an explosion or leakage of flammable liquid or gas;
 - Unplug the AC power cable to disconnect from line voltage.

WARNING: GROUNDING INSTRUCTIONS

This product must be grounded. In the event of malfunction or breakdown, grounding provides a path of least resistance for electrical current to reduce the risk of electric shock. This product is equipped with a cord having an equipment grounding conductor and a grounding plug. The plug must be plugged into an outlet that is properly installed and grounded in accordance with all local codes and ordinances.

WARNING – Improper connection of the equipment grounding conductor may result in an electric shock. Check with a qualified electrician if you are in doubt as to whether the product is properly grounded. Do not modify the plug provided with the product – if it does not fit the outlet, have a proper outlet installed by a qualified electrician.

Storage and Maintenance instructions

1. Please store the product between 32°F- 104°F. Avoid exposing the product to rain or using the product in a humid environment.
2. To preserve battery lifespan, please discharge the battery to 30% and recharge it to 60% every three months.
3. Please keep the product laid flat during use, when charging, and during storage.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- (1) Reorient or relocate the receiving antenna.
- (2) Increase the separation between the equipment and receiver.
- (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- (4) Consult the dealer or an experienced radio / TV technician for help.

The following importer is the responsible party.

Company Name: Fantasia Trading LLC
Address: 5350 Ontario Mills Pkwy, Suite 100, Ontario, CA 91764
Telephone: +1-800-988-7973

IC Statement

This device complies with Industry Canada license-ICES-003. Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This digital apparatus complies with CAN ICES-3(B)/NMB-3(B).

Declaration of Conformity

Hereby, Anker Innovations Limited declares that the product type A1770 is in compliance with Directives 2014/35/EU & 2014/30/EU & 2011/65/EU. The full text of the EU declaration of conformity is available at the following internet address:
<https://www.anker.com>

GB Declaration of Conformity

Hereby, Anker Innovations Limited declares that the product type A1770 is in compliance with Electrical Equipment (Safety) Regulations 2016 & Electromagnetic Compatibility Regulations 2016 & The Restriction of Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012. The full text of the GB declaration of conformity is available at the following internet address:

<https://www.anker.com>.

Anker Innovations Limited | Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, HongKong
The following importer is the responsible party (contract for EU and UK matters)

Anker Innovations Deutschland GmbH | Georg-Muche-Strasse 3, 80807 Munich, Germany
Anker Technology (UK) Ltd | Suite B, Fairgate House, 205 Kings Road, Tyseley, Birmingham, B11 2AA, United Kingdom

Disclaimer

The Uninterruptible Power Supply (UPS) function is designed and manufactured for use in OA equipment such as PCs.

Do not use UPS in situations or with equipment that requires extremely high reliability or safety, such as the following:

- Medical equipment that directly affects human life.
- Equipment that may result in personal injury (such as equipment directly related to the operation and control of aircraft, ships, railroads, elevators, etc., or equipment that may be subject to constant vibration, such as automotive and marine equipment).

The product is not for use in high-risk activities. The product is not designed or intended for use in hazardous environments requiring fail-safe performance, or for use in any circumstance in which the failure of the product could lead directly to death, personal injury, severe physical or property damage, or that would affect the operation or safety of any medical or life support device (collectively, "High-Risk Activities"). Anker expressly disclaims any express or implied warranty of fitness for High-Risk Activities. Anker does not authorize use of any product in any High-Risk Activities. Any such use is improper and is a misuse of the product.

Customer Service



5-Year Limited Warranty



Lifetime Technical Support



support@anker.com

support.mea@anker.com (For Middle East and Africa Only)



- (US) +1 (800)988 7973 Mon-Fri 6:15 - 17:00 (PT)
- (UK) +44 (0) 1604 936200 Mon-Fri 6:00-17:00; Sat-Sun 6:00-14:00
- (DE) +49 (0) 69 9579 7960 Mo-Fr 6:00 - 11:00
- (Middle East & Africa) +971 42463266 Sun-Thu 9:00 - 17:30
- (UAE) +971 8000320817 Sun-Thu 9:00 - 17:30
- (KSA) +966 8008500030 Sun-Thu 8:00 - 16:30
- (Kuwait) +965 22069086 Sun-Thu 8:00 - 16:30
- (Egypt) +20 8000000826 Sun-Thu 7:00 - 15:30
- (AU) +61 3 8331 4800 Mon-Fri 8:30 - 17:00 (AEST)
- (TR) +90 0850 460 14 14 Mon-Fri 9:00 - 18:00
- (RU) +8 (800) 511-86-23 Mon-Fri 9:00 - 18:00 (MSK)
- (中国) +86 400 0550 036 周一至周五 9:00 - 17:30
- (日本) 03 4455 7823 月 - 金 9:00 - 17:00
- (한국) +82 02-1670-7098 월 - 금 10:00 - 17: 00